



TEST REPORT

According to ANSI/IES LM-80-15
For

Hongli Zhihui Group Co.,Ltd. Guangzhou Branch

Room 316, Building 2, No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China

Model: HL-AS-2835HW-2C-S1-08-PCT-HR5

Report Type: 6000 Hours Test Report		Product Type: LED Package	
Test Engineer:	Pote Wang	<i>Pote Wang</i>	
Report Number:	RSZ181027501-10-M1		
Test Date:	2018-10-27 to 2019-07-04		
Report Date:	2019-08-07		
Reviewed By:	Bill Xiong / EE Engineer	<i>Bill Xiong</i>	
Revised Note:	The previous report RSZ181027501-10 is replaced by this report on 2019-08-07		
Test Facility:	Test facility was located at No.69,Pulongcun ,Puxinhu Industrial Area, Tangxia , Dongguan, Guangdong, China.		
Prepared By:	Bay Area Compliance Laboratories Corp. (Dongguan). No.69,Pulongcun ,Puxinhu Industrial Area, Tangxia , Dongguan, Guangdong, China. Tel: +86-0769-86858888 Fax:+86-0769-86858588		
Accreditation:	The IAS Accreditation Number TL-460.		


Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.



TABLE OF CONTENTS

1 - General Information	3
1.1 Description of LED Light Sources	3
1.2 Standards and Reference Documentations	5
1.3 Testing Equipment	5
1.4 Drive Level	5
1.5 Ambient Conditions for Maintenance Test.....	5
1.6 Photometric Measurement Method and Uncertainty.....	5
1.7 Statement of Traceability	6
1.8 Sample Set.....	7
2 - Summary of Test Result	8
3 - Test Data	9
3.1 Data Set 1, 85°C, 150mA (Lumen Maintenance)	9
3.2 Data Set 1, 85°C, 150mA (Forward Voltage).....	10
3.3 Data Set 1, 85°C, 150mA (Chromaticity Shift).....	11
3.4 Data Set 2, 105°C, 150mA (Lumen Maintenance)	12
3.5 Data Set 2, 105°C, 150mA (Forward Voltage).....	13
3.6 Data Set 2, 105°C, 150mA (Chromaticity Shift).....	14
4 - DUT Photo	15
4.1 Mechanical Dimensions	15
4.2 DUT Photo.....	15
5 - Report Revision	16



Bay Area Compliance Laboratories Corp. (Dongguan)

No.69, Pulongcun, Puxinhu Industrial Area Tangxia ,
Dongguan, Guangdong, China.
The IAS Accreditation Number TL-460

HL-AS-2835HW-S1-08L-PCT-HR5(R9)	90	2700K	1	1	0.0510	861.11	150	/	150
HL-AS-2835DW-S1-08-PCT-HR5	90	2700K	1	1	0.0510	861.11	150	/	150
HL-AS-2835DW-S1-08-PCT-HR5(R9)	90	2700K	1	1	0.0510	861.11	150	/	150
HL-AS-2835DW-S1-08L-PCT-HR5	90	2700K	1	1	0.0510	861.11	150	/	150
HL-AS-2835DW-S1-08L-PCT-HR5(R9)	90	2700K	1	1	0.0510	861.11	150	/	150
HL-AS-2835D90W-2C-S1-08-PCT-HR5-CS-KY	90	2700K	2	1	0.1021	301.84	150	0.15	150
HL-AS-2835D90W-2C-S1-08-PCT-HR5 -KY	90	2700K	2	1	0.1021	301.84	150	0.15	150
HL-AS-2835D90W-2C-S1-08L-PCT-HR5-CS-KY	90	2700K	2	1	0.1021	301.84	150	0.15	150
HL-AS-2835D90W-2C-S1-08L-PCT-HR5 -KY	90	2700K	2	1	0.1021	301.84	150	0.15	150
HL-AS-2835DW-2C-S1-08-PCT-HR5-CS-KY	90	2700K	2	1	0.1021	301.84	150	0.15	150
HL-AS-2835DW-2C-S1-08-PCT-HR5 -KY	90	2700K	2	1	0.1021	301.84	150	0.15	150
HL-AS-2835DW-2C-S1-08L-PCT-HR5-CS-KY	90	2700K	2	1	0.1021	301.84	150	0.15	150
HL-AS-2835DW-2C-S1-08L-PCT-HR5 -KY	90	2700K	2	1	0.1021	301.84	150	0.15	150
SL-*D2835FTA-21EA*	90	2700K	2	1	0.1021	861.11	150	0.15	150
SL-*D2835FTA-21EA*H	90	2700K	2	1	0.1021	861.11	150		

Bay Area Compliance Laboratories Corp. (Dongguan)

No.69, Pulongcun, Puxinhu Industrial Area Tangxia ,
Dongguan, Guangdong, China.
The IAS Accreditation Number TL-460

FINAL

Bay Area Compliance Laboratories Corp. (Dongguan)

No.69, Pulongcun, Puxinhu Industrial Area Tangxia ,
Dongguan, Guangdong, China.
The IAS Accreditation Number TL-460

FUNVAL



Bay Area Compliance Laboratories Corp. (Dongguan)

No.69, Pulongcun, Puxinhu Industrial Area Tangxia ,
Dongguan, Guangdong, China.
The IAS Accreditation Number TL-460

1.8 Sample Set

Data Set 1: 85°C, 150mA

Part Number: HL-AS-2835HW-2C-S1-08-PCT-HR5
Number of Units: 25
Case Temperature: >83°C
Ambient Temperature: >80°C
Life Test Drive Current: 150mA
Measurement Current: 150mA

Data Set 2: 105°C, 150mA

Part Number: HL-AS-2835HW-2C-S1-08-PCT-HR5
Number of Units: 25
Case Temperature: >103°C
Ambient Temperature: >100°C
Life Test Drive Current: 150mA
Measurement Current: 150mA

2 - Summary of Test Result

Data Set:	Sample Size	Failures Observed:	Test Interval	Test Duration			Reported TM -21 L ₇₀ Lifetime
1	25	0	1000hrs	6000hrs	2.352E-06	1.003	>36000 hours
2	25	0	1000hrs	6000hrs	3.077E-06	1.003	>36000 hours


Average Lumen Maintenance (Percentage of Initial Luminous Flux)


Data Set:	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	100.08%	99.85%	99.63%	99.41%	99.16%	98.90%
2	100.02%	99.72%	99.42%	99.11%	98.81%	98.49%

Average Chromaticity Shift

Data Set:	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	0.0002	0.0005	0.0008	0.0011	0.0014	0.0017
2	0.0004	0.0007	0.001	0.0013	0.0016	0.0019

Average Lumen Maintenance and Chromaticity Shift VS. Time

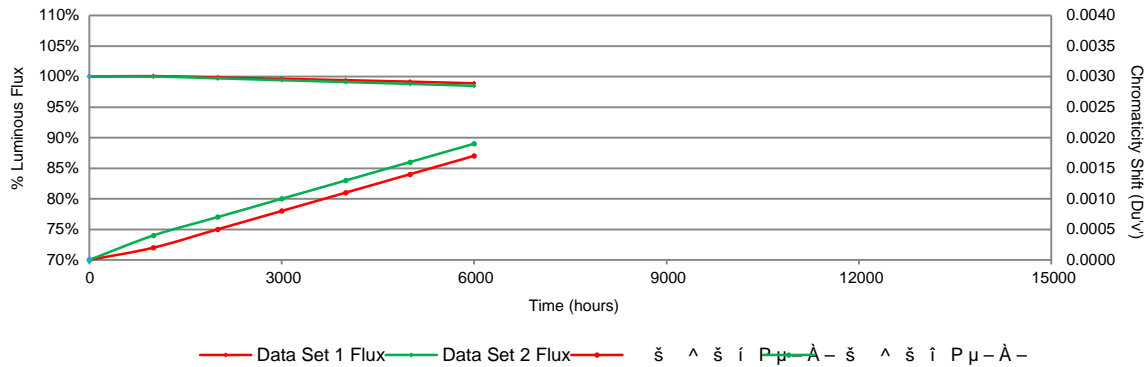




3 - Test Data

3.1 Data Set 1, 85°C, 150mA (Lumen Maintenance)

No.	Lumen Maintenance (%)						
	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	112.1	99.91	99.73	99.46	99.38	98.93	98.75
2	108.8	100.18	99.82	99.45	99.26	99.08	98.62
3	112.8	100.09	99.91	99.73	99.47	99.29	98.94
4	111.8	100.18	99.91	99.55	99.28	99.02	98.75
5	111.9	100.09	100.00	99.91	99.64	99.37	99.29
6	113.0	100.35	100.09	99.82	99.73	99.56	99.38
7	109.9	100.18	100.09	100.00	99.73	99.45	99.09
8	110.5	100.27	99.82	99.64	99.55	99.37	99.19
9	111.5	100.27	100.09	99.82	99.55	99.37	99.01
10	110.7	100.18	100.00	99.73	99.64	99.19	99.01
11	111.7	100.18	100.09	99.91	99.64	99.37	99.10
12	112.0	99.82	99.64	99.38	99.29	99.11	98.84
13	110.6	100.27	100.09	100.00	99.91	99.73	99.37
14	111.1	100.18	100.00	99.91	99.82	99.55	99.28
15	109.6	99.82	99.54	99.09	98.81	98.63	98.36
16	112.0	99.91	99.46	99.20	98.93	98.66	98.48
17	110.8	100.09	99.64	99.37	99.10	98.83	98.47
18	111.6	99.82	99.46	99.10	98.84	98.66	98.48
19	112.5	100.09	99.82	99.47	99.02	98.93	98.76
20	111.7	99.91	99.73	99.64	99.37	99.10	98.75
21	111.7	100.09	99.82	99.55	99.46	99.28	99.19
22	111.6	100.09	99.91	99.82	99.46	99.28	98.84
23	112.2	100.27	100.09	100.00	99.64	99.20	99.02
24	111.7	99.91	99.64	99.37	99.10	98.84	98.48
25	112.3	99.91	99.82	99.73	99.55	99.29	99.11
Avg.	111.4	100.08	99.85	99.63	99.41	99.16	98.90
Med.	111.7	100.09	99.82	99.64	99.46	99.20	98.94
st dev	1.0	0.16	0.20	0.28	0.30	0.30	0.31
Min.	108.8	99.82	99.46	99.09	98.81	98.63	98.36
Max.	113.0	100.35	100.09	100.00	99.91	99.73	99.38



Bay Area Compliance Laboratories Corp. (Dongguan)

No.69, Pulongcun, Puxinhu Industrial Area Tangxia ,
Dongguan, Guangdong, China.
The IAS Accreditation Number TL-460

3.2 Data Set 1, 85°C, 150mA (Forward Voltage)



FUNIVAL

ay Area Compliance Laboratories Corp. (Dongguan)

No.69, Pulongcun, Puxinhu Industrial Area Tangxia ,

Dongguan, Guangdong, China.

The IAS Accreditation Number TL-460

nce)

tenance (%)		
4000hrs	5000hrs	6000hrs
99.19	99.01	98.74
99.10	98.74	98.38
98.93	98.57	98.03
99.01	98.65	98.20
99.10	98.74	98.29
99.10	99.01	98.65
98.92	98.64	98.28
99.18	98.91	98.54
98.66	98.48	98.39
98.91	98.55	98.19
99.01	98.56	98.29
99.18	98.91	98.54
98.98	98.71	98.34
99.46	99.19	99.01
99.82	99.54	99.26
98.65	98.38	98.02
98.84	98.57	98.30
99.28	98.73	98.46
99.09	98.82	98.46
98.93	98.75	98.39
99.20	98.84	98.66
99.28	98.92	98.83
99.36	98.99	98.62
99.46	99.28	98.92
99.19	98.83	98.56
99.11	98.81	98.49




Bay Area Compliance Laboratories Corp. (Dongguan)

No.69, Pulongcun, Puxinhu Industrial Area Tangxia ,
Dongguan, Guangdong, China.
The IAS Accreditation Number TL-460

3.5 Data Set 2, 105°C, 150mA (Forward Voltage)

No.	Forward Voltage (V)						
	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
26	6.431	6.430	6.428	6.424	6.420	6.422	6.416
27	6.368	6.410	6.389	6.386	6.380	6.385	6.385
28	6.352	6.370	6.369	6.369	6.367	6.367	6.361
29	6.359	6.372	6.365	6.367	6.365	6.373	6.361
30	6.369	6.313	6.311	6.315	6.319	6.311	6.307
31	6.297	6.319	6.319	6.314	6.314	6.314	6.308

FINAL



Bay Area Compliance Laboratories Corp. (Dongguan)

No.69, Pulongcun, Puxinhu Industrial Area Tangxia ,
Dongguan, Guangdong, China.
The IAS Accreditation Number TL-460

3.6 Data Set 2, 105°C, 150mA (Chromaticity Shift)

No.			CCT(K)	A					
	0hr(Initial)			1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
26	0.2624	0.5307	2689	0.0002	0.0004	0.0006	0.0009	0.0011	0.0014

FINAL

